

KICT90BL

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709262181
Hood width	90 cm







Aesthetics

Colour	Stainless steel	Glass Type	Black
Finishing	Satin	Logo	Embossed
Aesthetics	Universale		

Controls

			
Control setting	Touch control	Led color	Red

Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent	

Technical Features

			
No. of lights	2	Anti-grease filters	Stainless steel

Light type	LED	Filter replacement indicator	Yes
Light Power	1 W		
Free outlet maximum capacity	725 m³/h	Vent outlet	150 mm
Motor power	270 W	Minimum distance from GAS hob	650 mm
No. of filters	3	Minimum distance from ELECTRIC hob	500 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	300	52
Speed 2	420	59
Speed 3	580	66
Intensive speed	700	69

Accessories Included

Tube reduction	Yes
----------------	-----

Performance / Energy Label

A*


Annual Efficiency Consumption (AEChood)	42 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dB(A)
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dB(A)
Fluid Dynamic Efficiency (FDE)	35	Power Consumption in Off mode (Po)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.7
Lighting Efficiency (LE)	91 lux/W	Energy Efficiency Index	40.5
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	428 m³/h
Grease Filtering Efficiency (GFE)	75.1 %	Measured air pressure at best efficiency point (Pbep)	461 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	157 W
Air flow at minumum speed (Qmin)	300 m³/h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	580 m³/h	Average illumination of the light on the cooking surface (Emiddle)	200 lux
Air flow at boost speed (Qboost)	700 m³/h		
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	52 dB(A)		

Sound power level at
highest setting (Lwa) 66 dB(A)

Electrical Connection

Electrical connection rating 272 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1500 mm

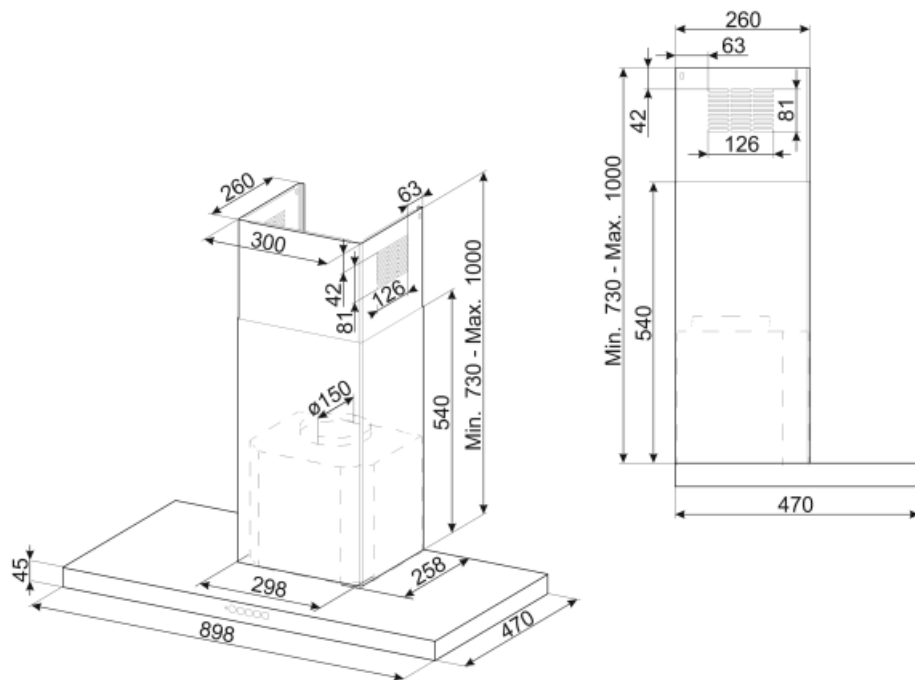

Not included accessories



KITFC161










Charcoal filters Kit 2 pieces



KITVENT150

Imbocco motore 150 mm con valvola di non ritorno

Symbols glossary (TT)

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		A smart infrared system, which allows a hood and hob with this feature to work together.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.
	Intensive/turbo setting: when extra fast extraction is required.		